Installation Checklist

Checklists available on the website:

◊ Water Saving Checklist

◊ Installation Checklist

◊ Maintenance Checklist

A little preparation work can go a long way

The best way to ensure your rainwater remains clean is to minimise contamination. This can be achieved simply by preventing contaminants from entering the tanks which can be achieved by using the checklist below.

Have you?
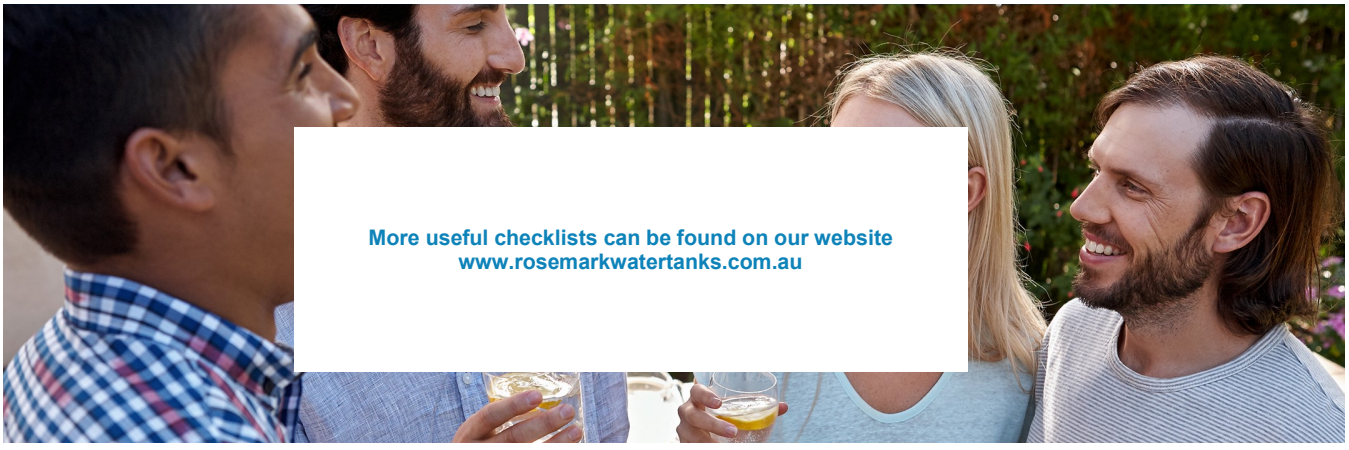
1. Pruned any branches that overhang catchment areas?
2. Prevented animal and insect access by screening all inlets, overflows, outlets and any other openings?
3. Installed leaf screens to all downpipes that feed into the water tank?
4. Allowed for the gutters to have sufficient and continuous fall to downpipes to prevent pooling?
5. Cleaned out gutters and downpipes of any leaf litter?
6. Stopped the overflow from appliances such as evaporative coolers, water heaters draining on the rainwater collection area?
7. Installed gutter screens/guards to reduce the frequency of gutter clearing?
8. Painted over any large amounts of uncoated lead flashing and stopped collection from roofs containing high levels of lead paint?
9. Installed an appropriately sized first flush diverter (min. 20 litres should be diverted for every 100m2 of roof catchment)?
10. Read and abided by the product safety warnings including locating the tank in a suitable position with a firm level base on the ground.